




SKSR Shelf Refrigerator

MODEL SKSR/C10

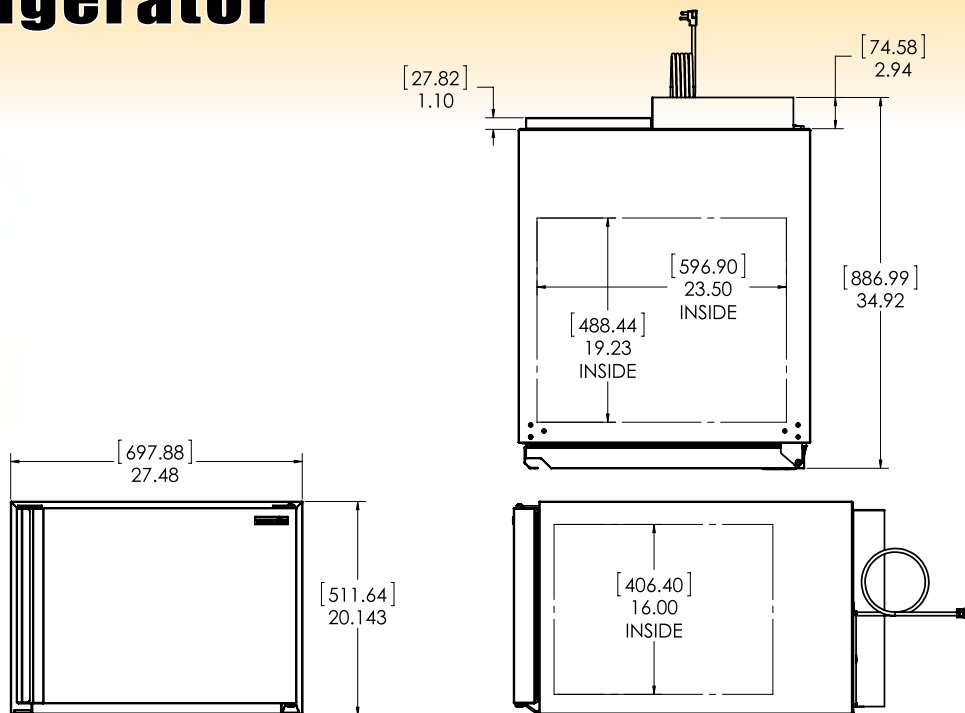

MODEL	LENGTH	DEPTH	HEIGHT	STORAGE CAPACITY	AMPS	SHIPPING WEIGHT
MODEL SKSR/C10	27.48"	34.92"	20.14"	4.4 cu. ft.	2.9	140 lbs

- EXTERIOR** Stainless steel, Galvanized back and bottom.
- INTERIOR** Aluminum corrosion-resistant material with coved corners throughout for easy cleaning and sanitation.
- INSULATION** Environmentally friendly foamed-in-place polyurethane insulation for maximum strength and durability.
- DOOR** Polyurethane insulation, stainless steel exterior and extra heavy-duty magnetic "Thermo Rubber" door gaskets combine to make the toughest, longest lasting door in the industry. Glass door with interior light optional.
- DOOR GASKETS** Santo Prene material lasts four times industry standard.
- SHELF** Heavy gauge wire shelf is hand dipped, not sprayed, providing double thick epoxy coating for superior durability and smooth finish. Adjustable in 1/2" increments on stainless steel pilasters.
- REFRIGERATION** CFC-free refrigerant. Hermetically sealed, high efficiency, self contained refrigeration system features automatic defrost and forced air circulation. Adjustable temperature control and built-in temperature indicator standard. Automatic condensate evaporator eliminates the need for plumbing or floor drains.
- ELECTRICAL** Standard as 115 volt, 60Hz, single phase operation. 8 foot, 3-wire power cord with NEMA 5-15 plug.
- LISTINGS** ETL Safety (U.S. and Canada), ETL Sanitation.
- WARRANTY** One year parts and labor. Five year warranty on compressor.



1600 Xenium Lane North
 Minneapolis, MN 55441-3787
 Phone (763) 923-2441
 Fax (763) 553-1209
www.silverking.com



Specifications subject to change without notice.

2016 - 39656, REV A
 © Silver King 2016
 Printed in U.S.A.