



## Features

### **Eco-Friendly Refrigerant**

R290 refrigerant with a global warming potential (GWP) of 3

### **Crew-Proof Construction**

Stainless steel exterior, galvanized bottom to reduce the risk of corrosion, and heavy-duty soft casters

### **Insulated Lids**

Removable, side-to-side sliding lids for easy access

### **Cabinet Capacity**

Maximized interior storage area of 3.93 cubic feet

### **Protective Bumpers**

Protective bumpers to reduce equipment impact

### **Mobility**

2" heavy-duty soft casters plus a sleek design allow for easy movement around the kitchen

### **Easy to Clean**

Stainless steel interior with coved corners, finished edges, plus removable cover and top section

### **High-Density Insulation**


Foamed-in-place, CFC-free polyurethane insulation for maximum strength, rigidity, and insulation

### **Cold Wall Refrigeration System**

Optimized temperature control thanks to the cold wall refrigeration and top access

### **Digital Temperature Control**

Externally mounted temperature controls for ease of use

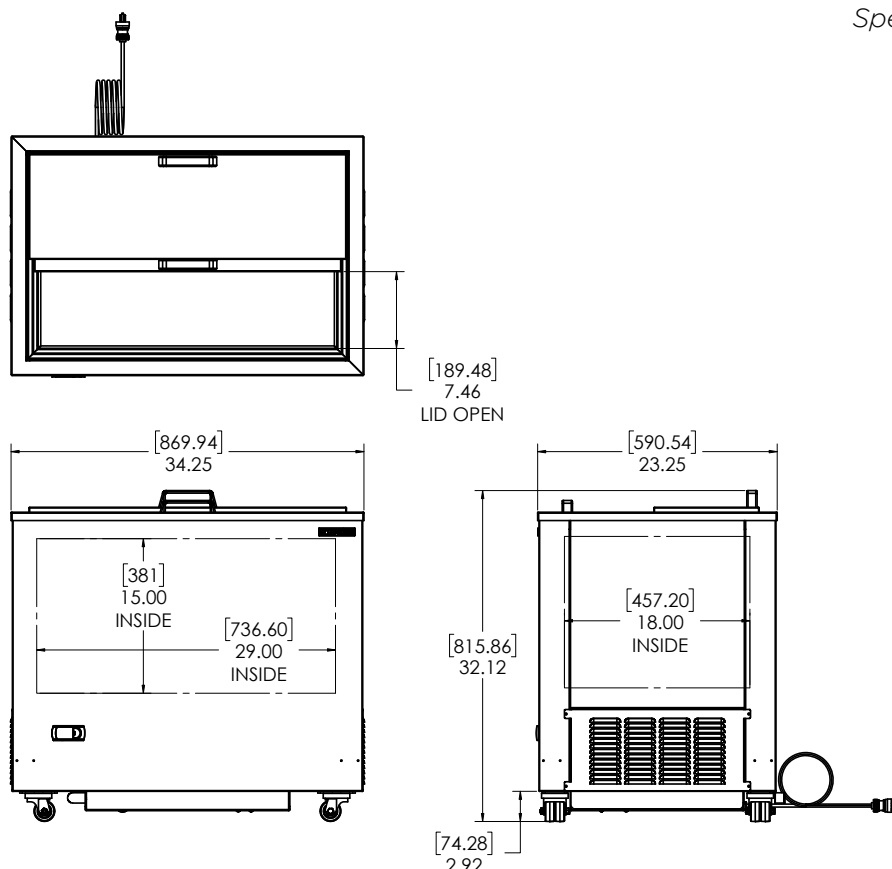

## Technical Specifications

|                                  |   |
|----------------------------------|---|
| <b>Electrical Requirements</b>   | 115v/60hz/1ph/1.1A/NEMA 5-15P Plug                        |
| <b>Product Dimensions</b>        | 34.25"W x 32.12"H x 24.75"D<br>(87cm x 81.58cm x 62.87cm) |
| <b>Product Weight</b>            | 175lbs (79.38kg)  |
| <b>Shipping Dimensions</b>       | 29"W x 41"H x 39"D<br>(73.66cm x 104.14cm x 99.06cm)      |
| <b>Shipping Weight</b>           | 190lbs (86.18kg)  |
| <b>Shipping Cubic Dimensions</b> | 26.84ft <sup>3</sup> (0.76m <sup>3</sup> )                |
| <b>Temperature Range</b>         | -5 to 5°F (-20.6 to -15°C)                                |
| <b>Refrigerant</b>               | R290  |
| <b>Charge Level</b>              | 2.8oz (79.4 grams)  |

|                              |  |
|------------------------------|--|
| <b>Insulation</b>            | Foamed-in-place, CFC-free polyurethane                         |
| <b>Exterior Construction</b> | Stainless steel exterior with galvanized bottom                |
| <b>Interior Construction</b> | Stainless steel interior with coved corners and finished edges |
| <b>Lids</b>                  | Side-to-side sliding, insulated, removable                     |
| <b>Internal Capacity</b>     | 3.93ft <sup>3</sup>  |
| <b>Casters</b>               | Four (4) 2" heavy-duty soft casters                            |
| <b>Certifications</b>        | ETL SAFETY, ETL SANITATION                                     |
| <b>Warranty</b>              | 3-year parts and labor, 5-year compressor (part only)          |

| Model Number  | Description   |
|---------------|---|
| SKFMW34-ELUS5 | Meatwell freezer 34", 115v/60hz/1ph, insulated front to back sliding lids, 2" heavy-duty soft casters, NEMA 5-15P |

To learn more about **Meatwell Freezer**, visit [silverking.com](https://silverking.com)