



Features

Eco-Friendly Refrigerant

R290 refrigerant with a global warming potential (GWP) of 3

Elevated Countertop Compartments

Elevated rail holds up to nine (9) 1/3 size pans and positions key ingredients closer to the crew — pan adapters included

High-Efficiency Refrigeration System

Forced air circulation provides uniform temperature throughout the cabinet

Easy to Clean

Aluminum interior, coved corners, finished edges, removable cutting board, and top compartment crumb tray for simple cleaning

High-Density Insulation

Foamed-in-place, CFC-free polyurethane insulation for maximum strength, rigidity, and insulation

Large 16" Cutting Board

Removable 16" polyethylene cutting board provides a durable work surface

Drawer Capacity

Large drawers include two (2) divider bars to accommodate two (2) full-size 12" W x 20" D x 4" H and one (1) half-size 12" W x 10" D x 4" H hotel pans. Small drawers include one (1) divider bar to accommodate two (2) full-size hotel pans — additional pan adapters are available for fractional pans

Stainless Steel Exterior


Galvanized back and bottom to reduce the risk of corrosion

Magnetic 'Thermo Rubber' Gaskets

Heavy-duty, stainless steel doors with magnetic 'Thermo Rubber' gaskets ensure an air-tight cabinet

Heavy-Duty Soft Casters

Secured to a 12 gauge steel base to ensure years of worry-free operation

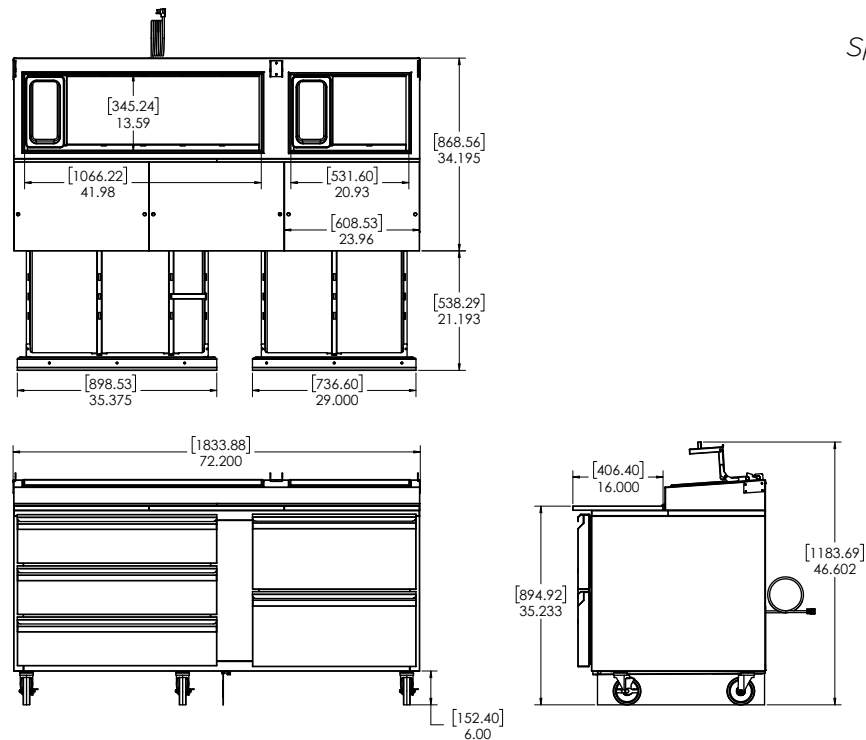

Technical Specifications

Electrical Requirements	115v/60hz/1ph/4.1A/NEMA 5-15P Plug	Exterior Construction	Stainless steel exterior with galvanized bottom
Product Dimensions	72.2"W x 41.14"H x 34.2"D (183.39cm x 104.50cm x 86.87cm)	Interior Construction	Aluminum interior with coved corners and finished edges
Product Weight	520lbs (235.87kg)	Drawers	Five (5) high-strength, full-extension drawers with dividers
Shipping Dimensions	77"W x 44"H x 38"D (195.58cm x 111.76cm x 96.52cm)	Lid	Two (2) hinged stainless steel, insulated (removable)
Shipping Weight	550lbs (249.48kg)	Pan Well Capacity	Supplied with nine (9) 1/3 size pans (4" deep)
Shipping Cubic Dimensions	74.5ft ³ (2.11Cu.M ³)	Internal Capacity	Accommodates four (4) full-size pans (6" deep), six (6) full-size pans (4" deep), and three (3) 1/2 size pans (4" deep)
Temperature Range	36 to 40°F (2.2 to 4.4°C)	Drawer Gasket	Santoprene™ gasket
Refrigerant	R290	Cutting Board	Three (3) 19" deep polyurethane cutting boards (removable)
Charge Level	5.3oz (150 grams)	Casters	Six (6) 5" heavy-duty soft casters (three locking)
Insulation	Foamed-in-place, CFC-free polyurethane	Certifications	ETL SAFETY, ETL SANITATION
		Warranty	3-year parts and labor, 5-year compressor (part only)

Model Number	Description
SKPZ72-EDUS3	Prep Table, 72", 115v/60hz/1ph, 5 drawer, 5" heavy-duty casters (three locking), tri-fold lid, 16"D cutting board, NEMA 5-15P

Accessories	Description
25567	Adapter Bars for Fractional Pans
43581	Pan 1/6 Size, 4" Deep Plastic
43643	Pan 1/6 Size, 6" Deep Plastic
27066	Pan 1/3 Size, 4" Deep Plastic
26415	Pan 1/3 Size, 6" Deep Plastic

To learn more about **Pizza Prep Table**, visit silverking.com