



Features

Glass Door Display

Double pane glass doors for clear visibility, improved safety, and energy savings — high-load brackets for long lasting durability

Removable Beverage Organizer

Includes Display Technologies Visi-Slide™ beverage system to ensure product is organized, visible and easily accessible

Eco-Friendly Refrigerant

R290 refrigerant with a global warming potential (GWP) of 3

Long-Lasting, Removable Gaskets

Santoprene™ gaskets last four times longer than standard gaskets

Easy to Clean

Aluminum interior, coved corners, finished edges, and removable shelves

Illuminated Cabinet

Bright LED lighting for easy visibility

Cabinet Capacity

Internal area of 11.56ft³ with four (4) heavy-gauge wire shelves — adjustable in 1/2" increments using stainless steel pilasters

High-Efficiency Refrigeration System

Forced air circulation provides uniform temperature throughout the cabinet

Stainless Steel Exterior


Galvanized back and bottom to reduce the risk of corrosion

High-Density Insulation

Foamed-in-place, CFC-free polyurethane insulation for maximum strength, rigidity, and insulation

Heavy-Duty Soft Casters

Secured to a 12 gauge steel base to ensure years of worry-free operations

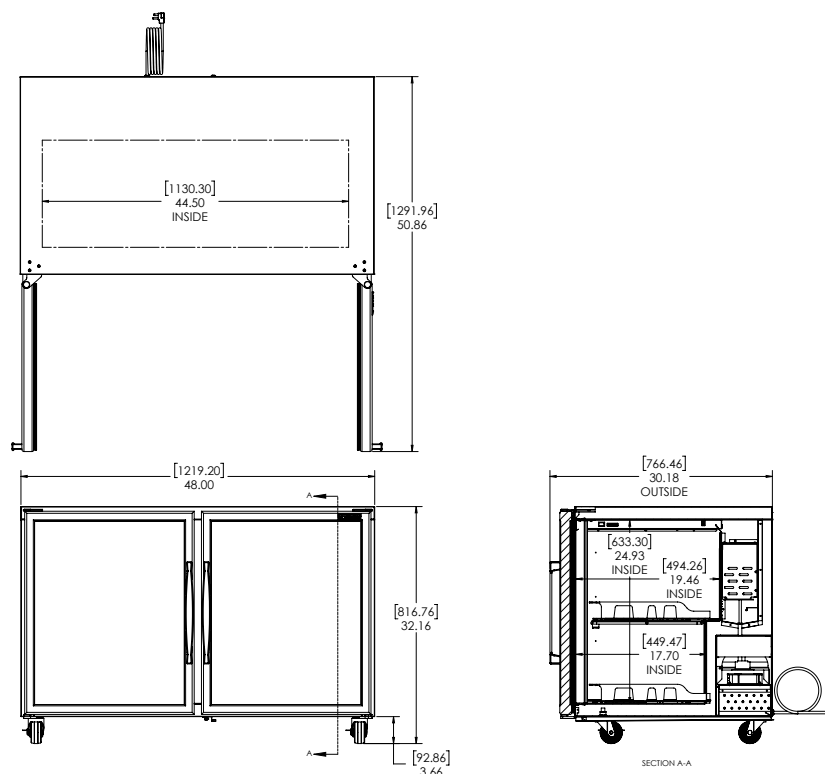

Technical Specifications

Electrical Requirements	115v/60hz/1ph/3.7A/NEMA 5-15P Plug
Product Dimensions	48"W x 32.16"H x 30.18"D (121.92cm x 81.69cm x 76.66cm)
Product Weight	265lbs (120.20kg)
Shipping Dimensions	53"W x 42"H x 34"D (134.62cm x 106.68cm x 86.36cm)
Shipping Weight	300lbs (136.08kg)
Shipping Cubic Dimensions	45.09ft ³ (1.28m ³)
Temperature Range	36 to 38 (2.22 to 3.33°C)
Refrigerant	R290
Charge Level	3.2oz (90.7grams)

Insulation	Foamed-in-place, CFC-free polyurethane
Exterior Construction	Stainless steel exterior with galvanized back and bottom
Interior Construction	Aluminum interior with coved corners and finished edges
Doors	Two (2) glass thermopane doors, one (1) left-hand swing and one (1) right-hand swing
Shelves	Two (2) heavy-gauge wire shelves
Interior Capacity	11.56ft ³
Door Gasket	Santoprene™ gasket
Casters	Four (4) 3" heavy-duty casters (two locking)
Certifications	ETL Safety, ETL Sanitation
Warranty	3-year parts and labor, 5-year compressor (part only)

Model Number	Description
SKR48A-EGUS1	Undercounter Refrigerator 48", 115v/60hz/1ph, two glass doors, 3" heavy-duty soft casters (two locking), Visi-Slide beverage system, NEMA 5-15P

To learn more about **Undercounter Refrigerator**, visit silverking.com