



Features

Eco-Friendly Refrigerant

R290 refrigerant with a global warming potential (GWP) of 3

Easy to Clean

Stainless steel interior with coved corners, finished edges, and removable lids

High-Density Insulation

Foamed-in-place, CFC-free polyurethane insulation for maximum strength, rigidity, and insulation

Cold Wall Refrigeration System

Optimized temperature control thanks to the cold wall refrigeration and top access

Heavy-Duty Construction

Stainless steel exterior plus galvanized lower cabinet and base reduce the risk of corrosion

Clear Polycarbonate Hinged Lid


Insulated, clear polycarbonate hinged lid for displaying product to customers

Cabinet Capacity

Maximized interior storage area of 1.3ft³

Integrated Design

Fitted flange design ensures the fit within any countertop

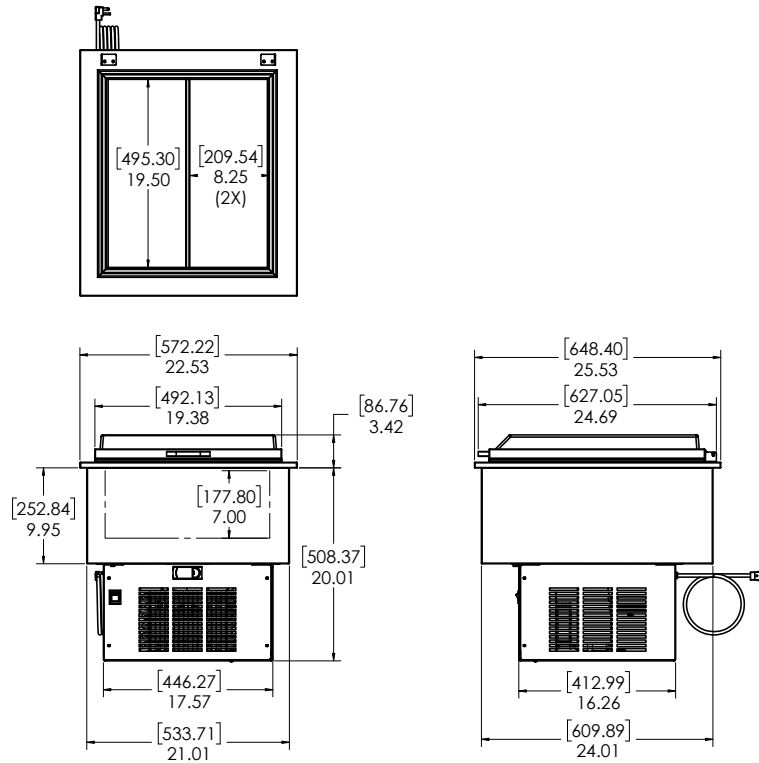

06.10.22

Technical Specifications

Electrical Requirements	115v/60hz/1ph/2.1a NEMA 5-15P
Product Dimensions	22.53"W x 23.43"H x 25.53"D (57.23cm x 59.51cm x 64.85cm)
Product Weight	105lbs (47.63kg)
Shipping Dimensions	31"W x 32"H x 29"D (78.74cm x 81.28cm x 73.66cm)
Shipping Weight	115lbs (56.16kg)
Shipping Cubic Dimensions	13.61ft ³ (0.38m ³)
Temperature Range	-5 to 5°F (-20.6 to -15°C)
Refrigerant	R290
Charge Level	1.4oz (39.7 grams)

Insulation	Foamed-in-place, CFC-free polyurethane
Exterior Construction	Stainless steel exterior with galvanized lower cabinet and base
Interior Construction	Stainless steel interior with coved corners and finished edges
Lids	Insulated, clear polycarbonate, hinged
Internal Capacity	1.3ft ³ (0.04m ³)
Certifications	ETL Safety, ETL Sanitation
Warranty	1-year parts and labor, 5-year compressor (part only)

Model Number	Description
SKFDI23-ELUS1	Drop-In Freezer 23", 115v/60hz/1ph, insulated clear hinged lid, NEMA 5-15P

Accessories	Description
10315-08	Lid Strap Lock Kit

To learn more about **Drop-In Freezer**, visit silverking.com