



## Features

### **Eco-Friendly Refrigerant**

R290 refrigerant with a global warming potential (GWP) of 3

### **Standard 10" Cutting Board**

Removable 10" polyethylene cutting board provides a durable work surface

### **Stainless Steel Exterior**

Galvanized back and bottom to reduce the risk of corrosion

### **High-Efficiency Refrigeration System**

Forced air circulation provides uniform temperature throughout the cabinet

### **Stainless Steel Exterior**

Galvanized back and bottom to reduce the risk of corrosion

### **Magnetic 'Thermo Rubber' Gaskets**

Heavy-duty, stainless steel door with a magnetic 'Thermo Rubber' gasket ensure an air-tight cabinet

### **High-Density Insulation**

Foamed-in-place, CFC-free polyurethane insulation for maximum strength, rigidity, and insulation

### **Refrigerated Countertop Compartments**

Hold four (4) 1/4 size pans with removable pan adapter plate or up to eight (8) 1/6 size pans with optional pan adaptors

### **Cabinet Capacity**

Internal area of 4.36 cubic feet with two (2) heavy-gauge wire shelves — adjustable in 1/2" increments using stainless steel pilasters

### **High-Strength Doors**


Heavy-duty, stainless steel doors are assembled using high-load brackets for long lasting durability

### **Easy to Clean**

Aluminum interior, coved corners, finished edges, removable cutting board, and top compartment crumb tray for simple cleaning

### **Heavy-Duty Soft Casters**

Secured to a 12 gauge steel base to ensure years of worry-free operation

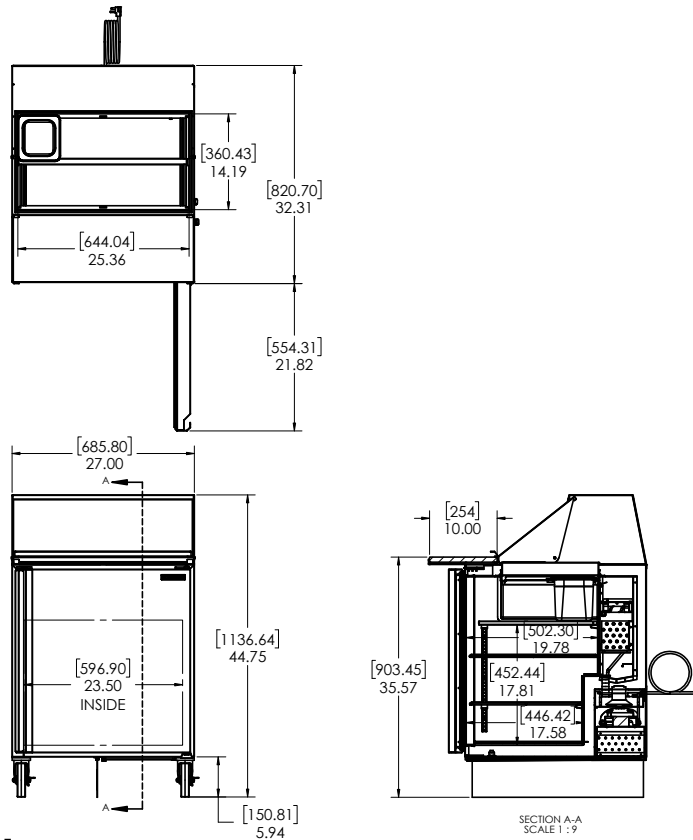

### Technical Specifications

<b>Electrical Requirements</b>	115v/60hz/1ph/2.7A/NEMA 5-15P Plug
<b>Product Dimensions</b>	27"W x 44.75"H x 32.31"D (68.58cm x 113.67cm x 82.07cm)
<b>Product Weight</b>	190lbs (86.18kg)
<b>Shipping Dimensions</b>	31"W x 46"H x 34"D (78.74cm x 116.84cm x 86.36cm)
<b>Shipping Weight</b>	210lbs (95.25kg)
<b>Shipping Cubic Dimensions</b>	28.06ft <sup>3</sup> (0.79m <sup>3</sup> )
<b>Temperature Range</b>	36 to 40°F (2.2 to 4.4°C)
<b>Refrigerant</b>	R290
<b>Insulation</b>	Foamed-in-place, CFC-free polyurethane
<b>Exterior Construction</b>	Stainless steel exterior with galvanized back and bottom

<b>Interior Construction</b>	Aluminum interior with coved corners and finished edges
<b>Doors</b>	One (1) right-hand swing door
<b>Shelves</b>	Two (2) heavy-gauge wire shelves
<b>Lid</b>	Two (2) tri-fold 3-position stainless steel (removable)
<b>Pan Well Capacity</b>	Accommodates four (4) 1/4 size pans (6" deep) — removable pan adapter plate included
<b>Internal Capacity</b>	4.36 cubic feet
<b>Door Gasket</b>	Santoprene™ gasket
<b>Cutting Board</b>	Three (3) 16" deep polyurethane cutting boards (removable)
<b>Casters</b>	Four (4) 5" heavy-duty soft casters (two locking)
<b>Certifications</b>	ETL Safety, ETL Sanitation
<b>Warranty</b>	1-year parts and labor, 5-year compressor (part only)

Model Number	Description
SKP278A-ESUS3	Prep Table, 27", 115v/60hz/1ph, single right-hand swing door, 5" heavy-duty casters (two locking), 10"D cutting board, 1/4 size pan adapter plate, NEMA 5-15P

Accessories	Description
25567	Adapter Bars for Fractional Pans
43581	Pan 1/6 Size, 4" Deep Plastic
43643	Pan 1/6 Size, 6" Deep Plastic
27066	Pan 1/3 Size, 4" Deep Plastic
26415	Pan 1/3 Size, 6" Deep Plastic

To learn more about **Prep Table**, visit [silverking.com](http://silverking.com)