



## Features

### **Eco-Friendly Refrigerant**

R290 refrigerant with a global warming potential (GWP) of 3

### **Easy to Clean**

Aluminum interior, coved corners, finished edges, and removable shelves

### **High-Strength Door**

Heavy-duty, stainless steel door assembled using high-load brackets for long lasting durability

### **Long-Lasting, Removable Gaskets**

Santoprene™ gaskets last four times longer than standard gaskets

### **High-Density Insulation**

Foamed-in-place, CFC-free polyurethane insulation for maximum strength, rigidity, and insulation

### **High-Efficiency Refrigeration System**

Forced air circulation provides uniform temperature throughout the cabinet

### **Cabinet Capacity**


Internal area of 6.3ft<sup>3</sup> with two (2) heavy-gauge wire shelves — adjustable in 1/2" increments using stainless steel pilasters

### **Heavy-Duty Soft Casters**

Secured to a 12 gauge steel base to ensure years of worry-free operation

### **Stainless Steel Exterior**

Galvanized back and bottom to reduce the risk of corrosion

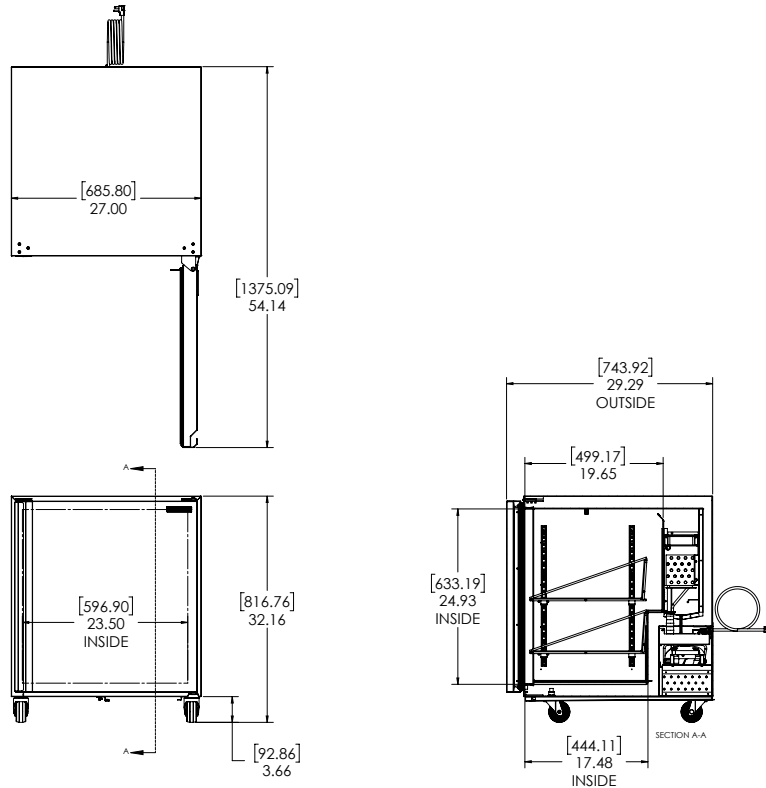

## Technical Specifications

|                                  |   |
|----------------------------------|---|
| <b>Electrical Requirements</b>   | 115v/60hz/1ph/1.6A/NEMA 5-15P Plug                        |
| <b>Product Dimensions</b>        | 27"W x 32.15"H x 29.32"D<br>(68.58cm x 81.66cm x 74.47cm) |
| <b>Product Weight</b>            | 140lbs<br>(63.50kg)                                       |
| <b>Shipping Dimensions</b>       | 32"W x 40"H x 37"D<br>(81.28cm x 101.60cm x 93.98cm)      |
| <b>Shipping Weight</b>           | 155lbs<br>(70.31kg)                                       |
| <b>Shipping Cubic Dimensions</b> | 27.41ft <sup>3</sup><br>(.78m <sup>3</sup> )              |
| <b>Temperature Range</b>         | 36 to 38<br>(2.22 to 3.33°C)                              |
| <b>Refrigerant</b>               | R290  |
| <b>Charge Level</b>              | 3.8oz (108 grams)   |
| <b>Insulation</b>                | Foamed-in-place, CFC-free polyurethane                    |

|                              |   |
|------------------------------|---|
| <b>Insulation</b>            | Foamed-in-place, CFC-free polyurethane  |
| <b>Exterior Construction</b> | Stainless steel exterior with galvanized back and bottom  |
| <b>Interior Construction</b> | Aluminum interior with coved corners and finished edges   |
| <b>Doors</b>                 | One (1) right-hand swing door   |
| <b>Internal Capacity</b>     | 6.3cu ft <sup>3</sup>   |
| <b>Door/Drawer Gasket</b>    | Santoprene™ gasket  |
| <b>Shelves</b>               | Two (2) heavy-gauge wire shelves  |
| <b>Casters</b>               | Four (4) 3" heavy-duty soft casters (two locking)   |
| <b>Certifications</b>        | ETL Safety, ETL Sanitation  |
| <b>Warranty</b>              | 1-year parts and labor, 5-year compressor (part only)   |
| <b>Cabinet Capacity</b>      | Internal area of 5.5ft <sup>3</sup> with two (2) heavy-gauge wire shelves – adjustable in 1/2" increments using stainless steel pilasters |

| Model Number | Description  |
|--------------|--|
| SKR27A-ESUS1 | Undercounter Refrigerator 27", 115v/60hz/1ph, single right-hand swing door, 3" heavy-duty soft casters (two locking), NEMA 5-15P |

To learn more about **Undercounter Refrigerator**, visit [silverking.com](http://silverking.com)