



Features

Eco-Friendly Refrigerant

R290 refrigerant with a global warming potential (GWP) of 3

Standard 10" Cutting Board

Removable 10" polyethylene cutting board provides a durable work surface

Stainless Steel Exterior

Galvanized back and bottom to reduce the risk of corrosion

High-Efficiency Refrigeration System

Forced air circulation provides uniform temperature throughout the cabinet

Stainless Steel Exterior

Galvanized back and bottom to reduce the risk of corrosion

Magnetic 'Thermo Rubber' Gaskets

Heavy-duty, stainless steel door with a magnetic 'Thermo Rubber' gasket ensure an air-tight cabinet

High-Density Insulation

Foamed-in-place, CFC-free polyurethane insulation for maximum strength, rigidity, and insulation

Refrigerated Countertop Compartments

Hold four (4) 1/4 size pans with removable pan adapter plate or up to eight (8) 1/6 size pans with optional pan adaptors

Cabinet Capacity

Internal area of 4.36 cubic feet with two (2) heavy-gauge wire shelves — adjustable in 1/2" increments using stainless steel pilasters

High-Strength Doors


Heavy-duty, stainless steel doors are assembled using high-load brackets for long lasting durability

Easy to Clean

Aluminum interior, coved corners, finished edges, removable cutting board, and top compartment crumb tray for simple cleaning

Heavy-Duty Soft Casters

Secured to a 12 gauge steel base to ensure years of worry-free operation

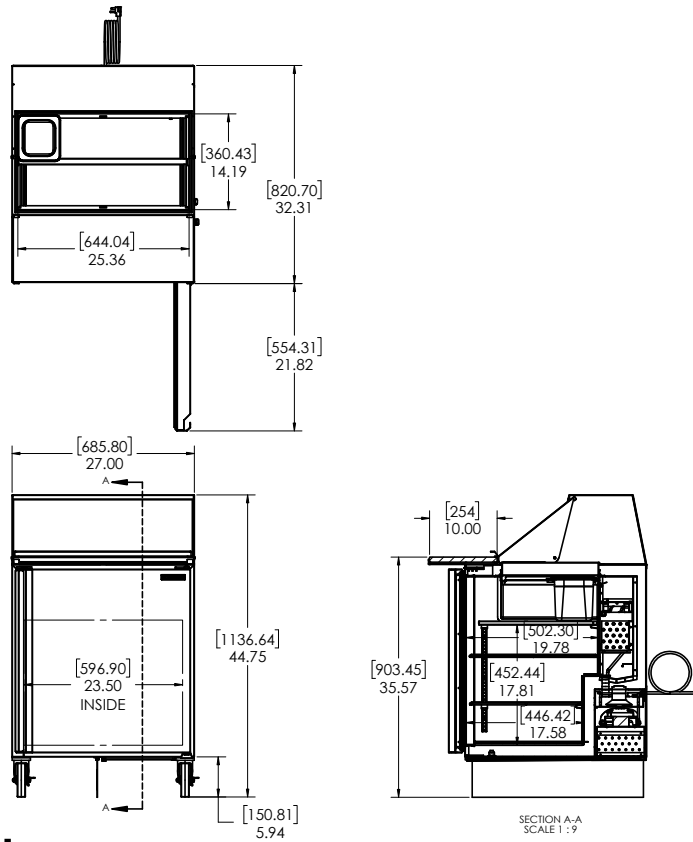

Technical Specifications

Electrical Requirements	115v/60hz/1ph/2.7A/NEMA 5-15P Plug
Product Dimensions	27"W x 44.75"H x 32.31"D (68.58cm x 113.67cm x 82.07cm)
Product Weight	190lbs (86.18kg)
Shipping Dimensions	31"W x 46"H x 34"D (78.74cm x 116.84cm x 86.36cm)
Shipping Weight	210lbs (95.25kg)
Shipping Cubic Dimensions	28.06ft ³ (0.79m ³)
Temperature Range	36 to 40°F (2.2 to 4.4°C)
Refrigerant	R290
Insulation	Foamed-in-place, CFC-free polyurethane
Exterior Construction	Stainless steel exterior with galvanized back and bottom

Interior Construction	Aluminum interior with coved corners and finished edges
Doors	One (1) right-hand swing door
Shelves	Two (2) heavy-gauge wire shelves
Lid	Stainless steel with rear hood
Pan Well Capacity	Accommodates four (4) 1/4 size pans (6" deep) – removable pan adapter plate included
Internal Capacity	4.36 cubic feet
Door Gasket	Santoprene™ gasket
Cutting Board	One (1) 10" deep cutting board (removable)
Casters	Four (4) 5" heavy-duty soft casters (two locking)
Certifications	ETL Safety, ETL Sanitation
Warranty	1-year parts and labor, 5-year compressor (part only)

Model Number	Description
SKP278A-ESUS3	Prep Table, 27", 115v/60hz/1ph, single right-hand swing door, 5" heavy-duty casters (two locking), 10"D cutting board, 1/4 size pan adapter plate, NEMA 5-15P

Accessories	Description
25567	Adapter Bars for Fractional Pans
43581	Pan 1/6 Size, 4" Deep Plastic
43643	Pan 1/6 Size, 6" Deep Plastic
27066	Pan 1/3 Size, 4" Deep Plastic
26415	Pan 1/3 Size, 6" Deep Plastic

To learn more about **Prep Table**, visit silverking.com