



Features

Exterior stainless steel with galvanized back and bottom reduces risk of corrosion.

Interior aluminum, with coved corners and finished edges for easy cleaning.

Environmentally friendly polyurethane foamed-in-place insulation for maximum strength and durability.

Supplied with four 3" casters (two with locks) for ease of placement.

Santoprene™ gaskets last four times longer than the industry standard.

Drawer capacity: Each drawer has a capacity of a full size 6" deep pan with several possible pan configurations for 1/9, 1/6, and 1/3 pan sizes.

CFC-free, R290 refrigerant hermetically sealed, high efficiency, self contained refrigeration system with automatic defrost and forced air circulation.


3 Wire power cord is a standard 8 feet in length with NEMA 5-15P plug.

Automatic condensate evaporator means no plumbing or floor drains.

Adjustable temperature control mounted in back for easy access.

Limited Warranty: 1-year labor, 1-year parts, 5-year compressor (part only), 90-days replacement parts. Warranty is determined by the original equipment manufacturing date for general market. *

*See detailed Terms & Conditions on Silver King website.

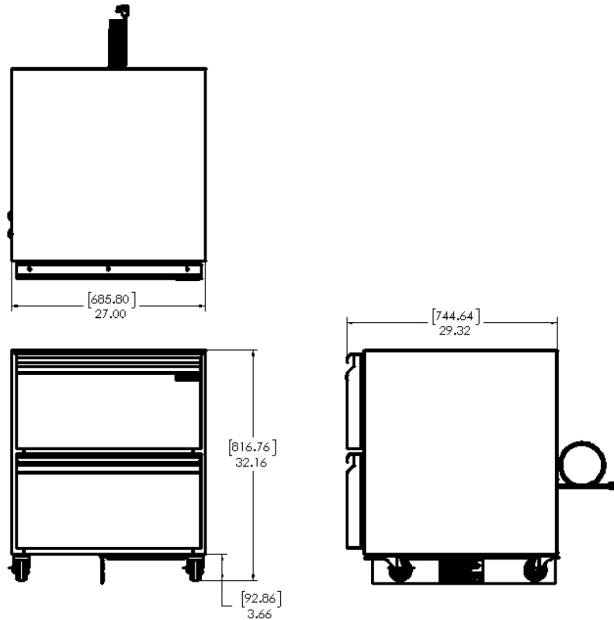

Technical Specifications

Dimensions

Model Number	Width in (mm)	Height in (mm)	Depth in (mm)	Gross Shipping Wgt lb (kg)	Unit Shipping Wgt lb (kg)	Shipping cu ft (cu m)
SKF27A-EDUS1	27 (685.80)	32.16 (816.76)	29.29 (743.92)	205 (93.0)	190 (86.18)	27.4 (.776)

Electrical

Model Number	Country of Origin	Amps	Voltage	Hz	Plug	Refrigerant
SKF27A-EDUS1	USA	2.0	115 VAC	60	NEMA 5-15P	R290

Certifications



To learn more about our **27" Undercounter Freezers**, visit silverking.com

To contact us directly, go to silverking.com/contact