



Features

Exterior stainless steel with galvanized back and bottom reduces risk of corrosion.

Interior aluminum with coved corners and finished edges for easy cleaning.

Superior door construction with polyurethane insulation, stainless steel exterior and extra heavy duty magnetic "Thermo Rubber" door gaskets, combined to make the toughest, longest lasting door in the industry.

Heavy gauge wire shelves are adjustable in 1/2" increments on stainless steel pilasters.


3 Wire power cord is a standard 8 feet in length, NEMA 5-15P plug.

Pans included: Twelve 1/6 size 4" deep pans.

5" casters supplied and are heavy-duty (two with locks) threaded into rivnuts, secured to a 12 gauge steel base to ensure durability.

CFC-free R290 refrigerant, hermetically sealed, highefficiency, self contained refrigeration system with automatic defrost and forced air circulation.

Limited Warranty: 1-year labor, 1-year parts, 5-year compressor (part only), 90-days replacement parts. Warranty is determined by the original equipment manufacturing date for general market. *

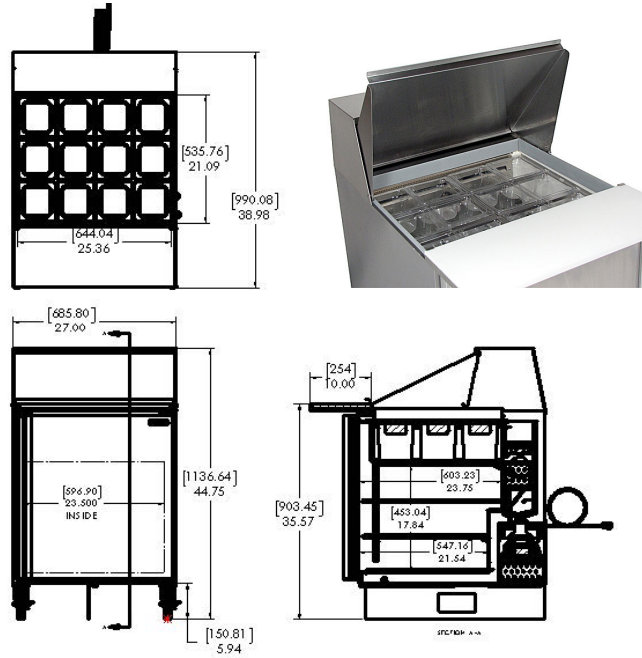

Technical Specifications

Dimensions

Model Number	Width in (mm)	Height in (mm)	Depth in (mm)	Gross Shipping Wgt lb (kg)	Unit Shipping Wgt lb (kg)	Shipping cu ft (cu m)
SKP2712A-ESUS2	27 (685.80)	44.75 (1136.64)	38.98 (990.98)	210 (95.26)	190 (86.18)	28.06 (.79)

Electrical

Model Number	Country of Origin	Amps	Voltage	Hz	Plug	Refrigerant
SKP2712A-ESUS2	USA	1.6	115 VAC	60	NEMA 5-15P	R290

Certifications



To learn more about our **Refrigerated Prep Tables**, visit silverking.com
To contact us directly, go to silverking.com/contact