



## Features

**Exterior stainless steel** with galvanized back and bottom reduces risk of corrosion.

**Interior aluminum** with coved corners and finished edges for easy cleaning.

**Superior door construction** with polyurethane insulation, stainless steel exterior and extra heavy duty magnetic "Thermo Rubber" door gaskets, combined to make the toughest, longest lasting door in the industry.

**Heavy gauge wire shelves** are adjustable in 1/2" increments on stainless steel pilasters.


**3 Wire power cord** is a standard 8 feet in length.

**Pans included:** Twelve 1/6 size 4" deep pans.

**5" casters supplied** and are heavy-duty (two with locks) threaded into rivnuts, secured to a 12 gauge steel base to ensure durability.

**CFC-free R290 refrigerant**, hermetically sealed, highefficiency, self contained refrigeration system with automatic defrost and forced air circulation.

**Limited Warranty:** 1-year labor, 1-year parts, 5-year compressor (part only), 90-days replacement parts. Warranty is determined by the original equipment manufacturing date for general market. \*

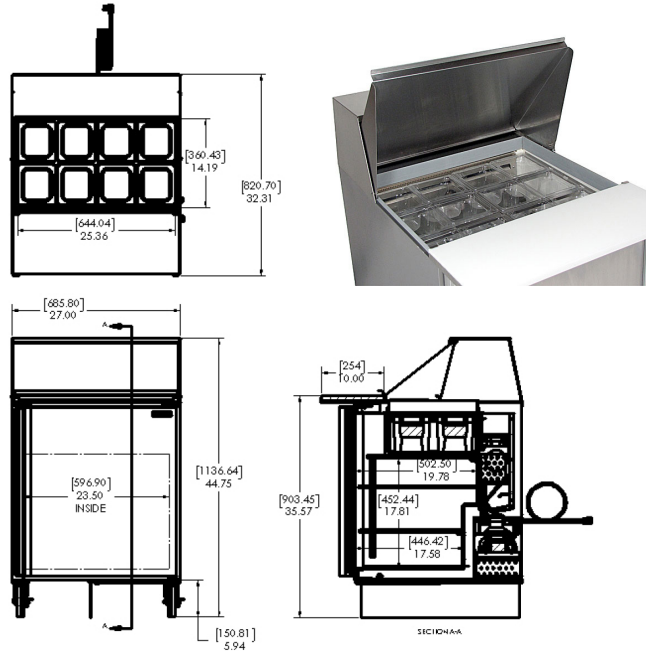

## Technical Specifications

### Dimensions

Model Number	Width in (mm)	Height in (mm)	Depth in (mm)	Gross Shipping Wgt lb (kg)	Unit Shipping Wgt lb (kg)	Shipping cu ft (cu m)
SKP278A-ESEU2	27 (685.80)	44.75 (1136.64)	32.31 (820.70)	210 (95.26)	190 (86.18)	28.06 (.79)
SKP278A-ESUK2	27 (685.80)	44.75 (1136.64)	32.31 (820.70)	210 (95.26)	190 (86.18)	28.06 (.79)

### Electrical

Model Number	Country of Origin	Amps	Voltage	Hz	Plug	Refrigerant
SKP278A-ESEU2	USA	0.8	230VAC	50/60	TYPE "E"	R290
SKP278A-ESUK2	USA	0.8	230VAC	50/60	TYPE "G"	R290

### Certifications



To learn more about our **Refrigerated Prep Tables**, visit [silverking.com](http://silverking.com)  
To contact us directly, go to [silverking.com/contact](http://silverking.com/contact)