



Features

Exterior stainless steel with galvanized back and bottom.

Interior aluminum with coved corners and finished edges for easy cleaning.

Environmentally friendly polyurethane foamed-in-place insulation for maximum strength and durability.

Superior door construction with polyurethane insulation, stainless steel exterior and extra heavy duty magnetic “Thermo Rubber” door gaskets, combined to make the toughest, longest lasting door in the industry.

Cutting Boards are constructed of high quality, durable polyurethane.


3 Wire power cord is a standard 8 feet in length, NEMA 5-15P plug.

5" casters supplied and are heavy-duty (two with locks) threaded into rivnuts, secured to a 12 gauge steel base to ensure durability.

CFC-free, R404A refrigerant, hermetically sealed, high efficiency, self contained refrigeration system with automatic defrost and forced air circulation.

Limited Warranty: 1-year labor, 1-year parts, 5-year compressor (part only), 90-days replacement parts. Warranty is determined by the original equipment manufacturing date for general market. *

*See detailed Terms & Conditions on Silver King website.

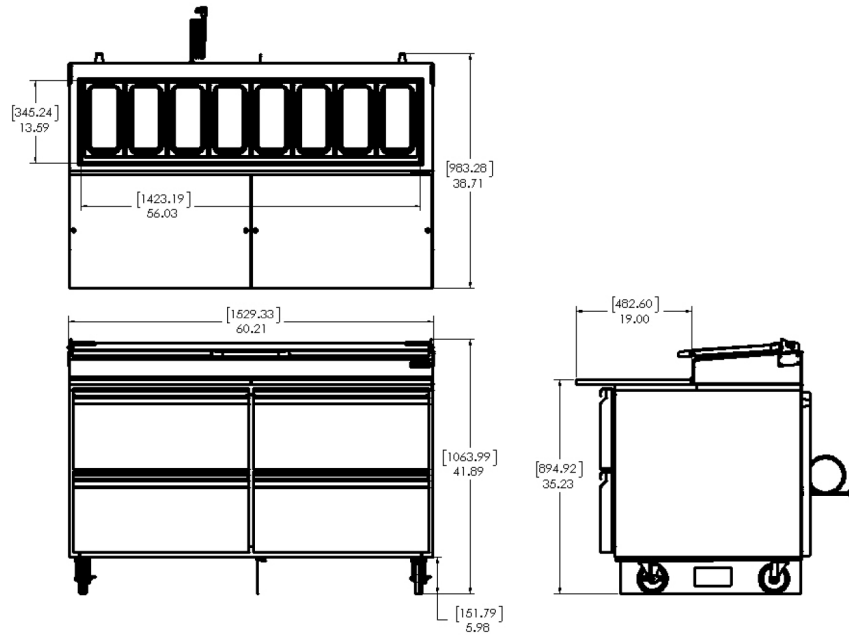

Technical Specifications

Dimensions

Model Number	Width in (mm)	Height in (mm)	Depth in (mm)	Gross Shipping Wgt lb (kg)	Unit Shipping Wgt lb (kg)	Shipping cu ft (cu m)
SKPZ60-FDUS10	60.21 (1529.33)	41.89 (1063.99)	38.71 (983.28)	530 (240.41)	505 (229.06)	67.18 (1.90)

Electrical

Model Number	Country of Origin	Amps	Voltage	Hz	Plug	Refrigerant
SKPZ60-FDUS10	USA	8.5	115VAC	60	NEMA 5-15P	R404A

Certifications



To learn more about our **Refrigerated Pizza Prep Table**, visit silverking.com.
To contact us directly, go to silverking.com/contact