



## Features

**Exterior stainless steel** with galvanized back and bottom reduces risk of corrosion.

**Interior aluminum**, with coved corners and finished edges for easy cleaning.

**Environmentally friendly** polyurethane foamed-in-place insulation for maximum strength and durability.

**Supplied with four 3" casters** (two with locks) for ease of placement.

**3 Wire power cord** is a standard 8 feet in length with NEMA 5-15P.

**Santoprene™ gaskets** last four times longer than the industry standard.

**Heavy gauge wire shelf** is adjustable in 1/2" increments on stainless steel pilasters.


**CFC-free, R290 refrigerant** hermetically sealed, high efficiency, self contained refrigeration system with automatic defrost and forced air circulation.

**Adjustable temperature control** mounted in back for easy access.

**Automatic condensate evaporator** means no plumbing or floor drains.

**Limited Warranty:** 1-year labor, 1-year parts, 5-year compressor (part only), 90-days replacement parts. Warranty is determined by the original equipment manufacturing date for general market. \*

\*See detailed Terms & Conditions on Silver King website.

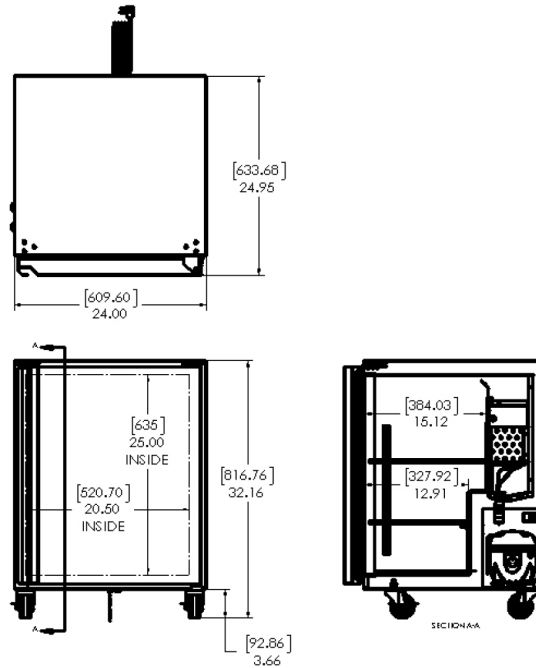

## Technical Specifications

### Dimensions

Model Number	Width in (mm)	Height in (mm)	Depth in (mm)	Gross Shipping Wgt lb (kg)	Unit Shipping Wgt lb (kg)	Shipping cu ft (cu m)
SKR24A-ESUS1	24 (609.60)	32.16 (816.76)	24.95 (633.68)	140 (63.50)	125 (56.70)	18.63 (.528)

### Electrical

Model Number	Country of Origin	Amps	Voltage	Hz	Plug	Refrigerant
SKR24A-ESUS1	USA	2.4	120 VAC	60	NEMA 5-15P	R290

### Certifications



To learn more about our **24" Undercounter Refrigerator**, visit [silverking.com](https://silverking.com)

To contact us directly, go to [silverking.com/contact](https://silverking.com/contact)