



Features

Exterior stainless steel with galvanized back and bottom reduces risk of corrosion.

Interior aluminum, with coved corners and finished edges for easy cleaning.

Environmentally friendly polyurethane foamed-in-place insulation for maximum strength and durability.

Supplied with four 3" casters (two with locks) for ease of placement.

Santoprene™ gaskets last four times longer than the industry standard.

CFC-free refrigerant hermetically sealed, high efficiency, self contained refrigeration system with automatic defrost and forced air circulation.


3 Wire power cord is a standard 8 feet in length with NEMA 5-15P plug.

Coated shelves are mounted on stainless steel pilasters adjustable in 1/2" increments.

Adjustable temperature control mounted in back for easy access.

Automatic condensate evaporator means no plumbing or floor drains.

Limited Warranty: 1-year labor, 1-year parts, 5-year compressor (part only), 90-days replacement parts. Warranty is determined by the original equipment manufacturing date for general market. *

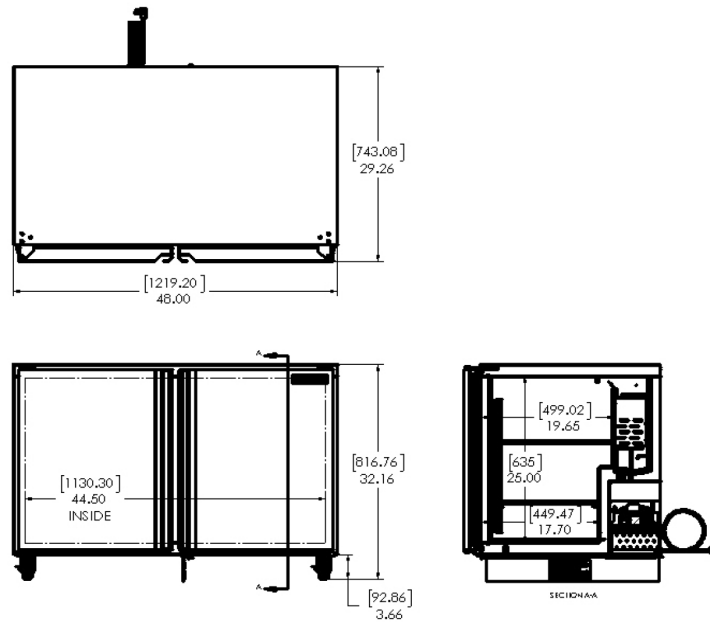

Technical Specifications

Dimensions

Model Number	Width in (mm)	Height in (mm)	Depth in (mm)	Gross Shipping Wgt lb (kg)	Unit Shipping Wgt lb (kg)	Shipping cu ft (cu m)
SKR48A-ESUS1	48.00 (1219.20)	32.16 (816.76)	29.26 (743.08)	265 (120.20)	245 (111.13)	39.72 (1.12)

Electrical

Model Number	Country of Origin	Amps	Voltage	Hz	Plug	Refrigerant
SKR48A-ESUS1	USA	3.7	115 VAC	60	NEMA 5-15P	R290

Certifications



To learn more about our **48" Undercounter Refrigerator**, visit silverking.com

To contact us directly, go to silverking.com/contact