



SKRCB38H-RD (SHOWN)

Features

Exterior stainless steel with galvanized back and bottom reduces risk of corrosion.

Interior aluminum with coved corners and finished edges for easy cleaning.

Environmentally friendly polyurethane foamed-in-place insulation for maximum strength and durability.

Full extension drawers This premier slide and framework construction promotes lateral stability while offering high dynamic load capacities and a stay-shut feature. All drawers accommodate full size 12" x 20" x 6" deep hotel pans and deep fractional pans. Drawers lift out for cleaning.

3 Wire power cord is a standard 7 feet in length.

Santoprene™ gaskets last four times longer than the industry standard.


CFC-free refrigerant hermetically sealed, high efficiency, self contained refrigeration system with automatic defrost and forced air circulation.

Heavy-duty casters secured to a 12 gauge steel base to ensure years of worry free operation.

Limited Warranty: 1-year labor, 1-year parts, 5-year compressor (part only), 90-days replacement parts. Warranty is determined by the original equipment manufacturing date for general market. *

*See detailed Terms & Conditions on Silver King website.

Model Number	Description	12"x20" Pan Capacity
SKRCB38H-RD	38" Refrigerated Storage Stand	4
SKRCB50H-RD	50" Refrigerated Storage Stand	6
SKRCB60H-RD	60" Refrigerated Storage Stand	6
SKRCB79H-RD	79" Refrigerated Storage Stand	10
SKRCB84H-RD	84" Refrigerated Storage Stand	10

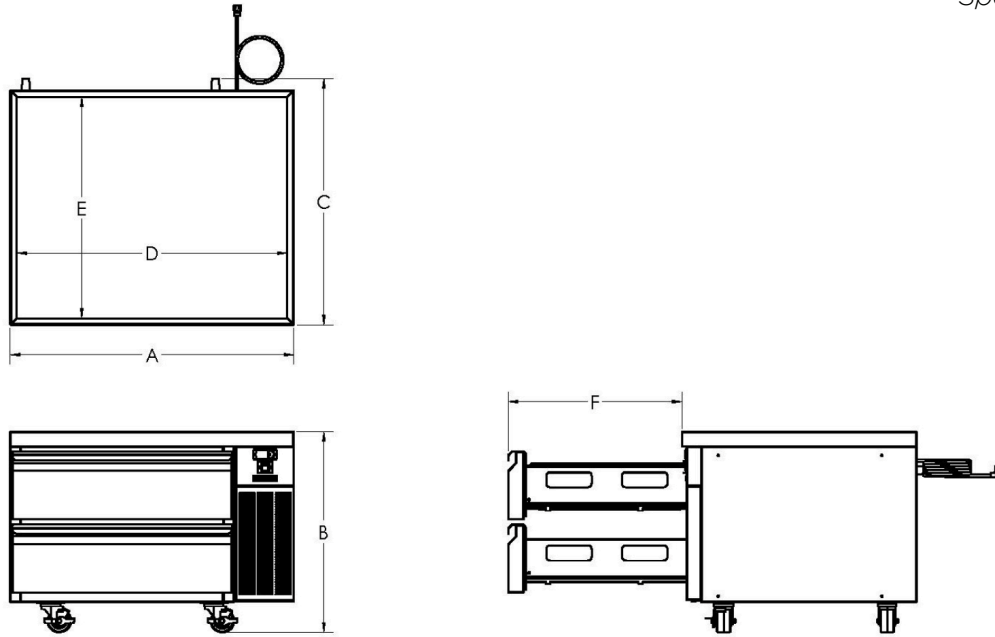

Technical Specifications

Dimensions

Model Number	Width A in (mm)	Height B in (mm)	Depth C in (mm)	Width D in (mm)	Depth E in (mm)	Depth F in (mm)	Gross Shipping Wgt lb (kg)	Shipping cu ft (cu m)
SKRCB38H-RD	37.49 (952.35)	26.47 (672.42)	32.58 (827.53)	35.74 (907.87)	29.25 (742.92)	22.97 (583.45)	285 (129.28)	27.77 (0.786)
SKRCB50H-RD	50.25 (1276.35)	26.47 (672.42)	32.58 (827.53)	48.50 (1231.87)	29.25 (742.92)	22.97 (583.45)	345 (156.49)	34.38 (0.97)
SKRCB60H-RD	60.50 (1536.69)	26.47 (672.42)	32.58 (827.53)	58.74 (1492.10)	29.25 (742.92)	22.97 (583.45)	395 (179.17)	41.25 (1.17)
SKRCB79H-RD	79.50 (2019.30)	26.47 (672.42)	32.58 (827.53)	77.74 (1974.51)	29.25 (742.92)	22.97 (583.45)	515 (233.60)	54.90 (1.55)
SKRCB84H-RD	84 (2133.60)	26.47 (672.42)	32.58 (827.53)	82.24 (2088.81)	29.25 (742.92)	22.97 (583.45)	565 (256.28)	57.48 (1.63)

Electrical

Model Number	Country of Origin	Amps	Voltage	Hz	Plug	Refrigerant
SKRCB38H-RD	USA	2.5	115 VAC	60	3 WIRE	R134A
SKRCB50H-RD	USA	3.0	115 VAC	60	3 WIRE	R134A
SKRCB60H-RD	USA	3.0	115 VAC	60	3 WIRE	R134A
SKRCB79H-RD	USA	3.1	115 VAC	60	3 WIRE	R134A
SKRCB84H-RD	USA	3.1	115 VAC	60	3 WIRE	R134A

Certifications



To learn more about our **Refrigerated Chef Bases**, visit silverking.com
 To contact us directly, go to silverking.com/contact