

48" Refrigerated Three Tier Fountainette

Model: SKRN48-ESUS1 115V

Specification Guide

FOUNTAINETTES



Features

Exterior stainless steel with galvanized back and bottom reduces risk of corrosion.

Interior aluminum with coved corners and finished edges for easy cleaning.

Environmentally friendly polyurethane foamed-in-place insulation for maximum strength and durability.

Four 5" casters (two with locks) provide for ease of placement.

3 Wire power cord is a standard 8 feet with NEMA 5-15P plug.

CFC-free refrigerant, hermetically sealed, high efficiency, self contained refrigeration system with automatic defrost and forced air circulation.

Santoprene™ gaskets last four times longer than the industry standard.

Coated shelf is mounted on stainless steel pilasters adjustable in 1/2" increments.

Adjustable temperature control with display mounted in back for easy access.

Automatic condensate evaporator means no plumbing or floor drains.


Limited Warranty: 1-year labor, 1-year parts, 5-year compressor (part only), 90-days replacement parts. Warranty is determined by the original equipment manufacturing date for general market. *

*See detailed Terms & Conditions on Silver King website.

48" Refrigerated Three Tier Fountainette

Model: SKRN48-ESUS1 115V

Specification Guide

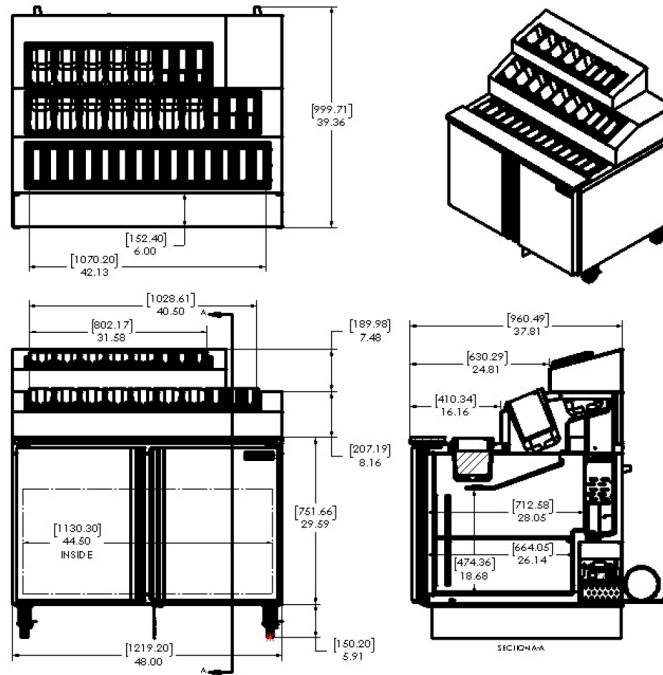

Technical Specifications

Dimensions

Model Number	Width in (mm)	Height in (mm)	Depth in (mm)	Gross Shipping Wgt lb (kg)	Unit Shipping Wgt lb (kg)	Shipping cu ft (cu m)
SKRN48-ESUS1	48.0 (1219.2)	51.14 (1299.03)	39.36 (999.71)	325 (147.42)	310 (140.61)	47.97 (1.36)

Electrical

Model Number	Country of Origin	Amps	Voltage	Hz	Plug	Refrigerant
SKRN48-ESUS1	USA	4.4	115VAC	60	NEMA 5-15P	R290

Certifications



To learn more about our **48" Refrigerated Three Tier Fountainette**, visit silverking.com. To contact us directly, go to silverking.com/contact