



Features

Exterior stainless steel with galvanized back and bottom reduces risk of corrosion.

Interior aluminum, with coved corners and finished edges for easy cleaning.

Environmentally friendly polyurethane foamed-in-place insulation for maximum strength and durability.

Santoprene™ gaskets last four times longer than the industry standard.

CFC-free, R134A refrigerant hermetically sealed, high efficiency, self contained refrigeration system with manual defrost.

Adjustable temperature control mounted in back for easy access.

3 Wire power cord is a standard 8 feet in length with NEMA 5-15P plug.

Automatic condensate evaporator means no plumbing or floor drains.


Casters: Optional 1 5/8" plate caster kit #10314-01 available.

Limited Warranty: 1-year labor, 1-year parts, 5-year compressor (part only), 90-days replacement parts. Warranty is determined by the original equipment manufacturing date for general market. *

27.5" Shelf Refrigerator

Models: SKRS28-RSUS10 (RH Door),
SKRS28-RSUS11 (LH Door) 115V/60HZ

Specification Guide

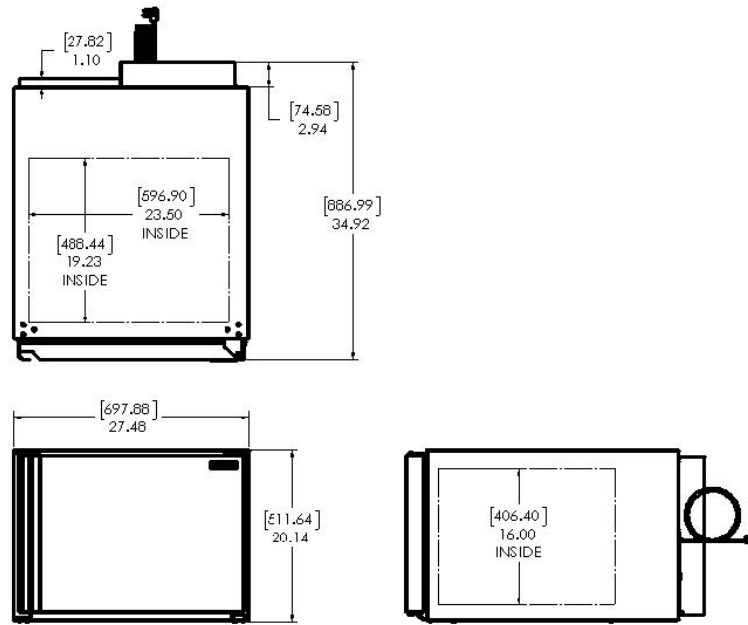

Technical Specifications

Dimensions

Model Number	Width in (mm)	Height in (mm)	Depth in (mm)	Gross Shipping Wgt lb (kg)	Unit Shipping Wgt lb (kg)	Shipping cu ft (cu m)
SKRS28-RSUS10 RH DOOR	27.48 (697.88)	20.14 (511.64)	34.9 (886.99)	140 (63.50)	125 (56.7)	19.09 (0.541)
SKRS28-RSUS11 LH DOOR	27.48 (697.88)	20.14 (511.64)	34.9 (886.99)	140 (63.50)	125 (56.7)	19.09 (0.541)

Electrical

Model Number	Country of Origin	Amps	Voltage	Hz	Plug	Refrigerant
SKRS28-RSUS10	USA	2.9	120 VAC	60	NEMA 5-15P	R134A
SKRS28-RSUS11	USA	2.9	120 VAC	60	NEMA 5-15P	R134A

Certifications



To learn more about our **27.5" Shelf Refrigerator**, visit silverking.com

To contact us directly, go to silverking.com/contact