



## Features

### Eco-Friendly Refrigerant

R290 refrigerant with a global warming potential (GWP) of 3

### High-Strength, Full-Extension Drawers

Premium slide and framework construction promotes lateral stability while offering high dynamic load capacities and a stay-shut feature

### Stainless Steel Exterior

Galvanized back and bottom to reduce the risk of corrosion

### Easy to Clean

Stainless steel interior, coved corners, finished edges, and easy lift-out drawers

### Long-Lasting, Removable Gaskets

Santoprene™ gasket last four times longer than standard gaskets

### Cold Wall Refrigeration System

Optimized temperature control thanks to the cold wall refrigeration

### Drawer Capacity


Each drawer accommodates one (1) full-size 12" W x 20" H x 6" D hotel pan — additional adapters are available for fractional pans

### High-Density Insulation

Foamed-in-place, CFC-free polyurethane insulation for maximum strength, rigidity, and insulation

### Mobility

3" heavy-duty soft casters plus a sleek design allow for easy movement around the kitchen

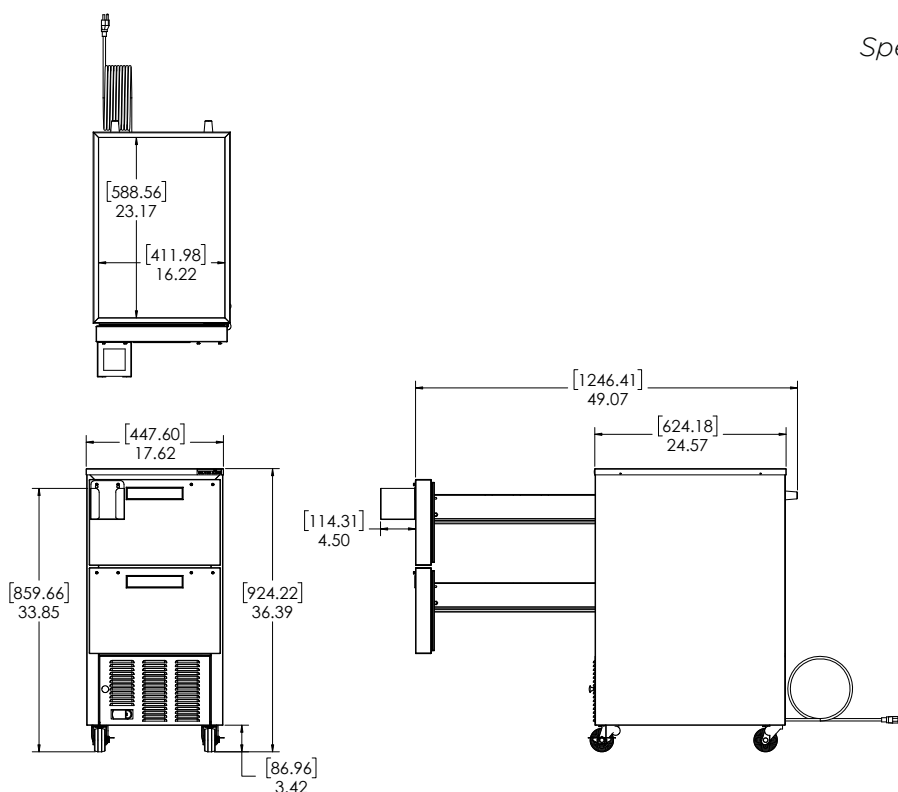

## Technical Specifications

<b>Electrical Requirements</b>	115v/60hz/1ph/NEMA 5-15P Plug
<b>Product Dimensions</b>	17.62"W x 36.39"H x 32.92"D (44.75cm x 92.43cm x 83.62cm)
<b>Product Weight</b>	160lbs (72.57kg)
<b>Shipping Dimensions</b>	22"W x 45"H x 33"D (55.88cm x 114.30cm x 83.82cm)
<b>Shipping Weight</b>	175lbs (79.38kg)
<b>Shipping Cubic Dimensions</b>	18.91ft <sup>3</sup> (0.54m <sup>3</sup> )
<b>Refrigerant</b>	R290
<b>Charge Level</b>	3.35oz (95 grams)

<b>Temperature Range</b>	36 to 40 (2.2 to 4.4°C)
<b>Insulation</b>	Foamed-in-place, CFC-free polyurethane
<b>Exterior Construction</b>	Stainless steel exterior with galvanized back and bottom
<b>Interior Construction</b>	Aluminum interior with coved corners and finished edges
<b>Drawers</b>	Two (2) high-strength, full-extension drawers
<b>Drawer Capacity</b>	Accommodates (2) full-size 12" W x 20" H x 6" D hotel pans
<b>Drawer Gaskets</b>	Santoprene™ gasket
<b>Casters</b>	Four (4) 3" heavy-duty soft casters (two locking)
<b>Certifications</b>	ETL Safety, ETL Sanitation
<b>Warranty</b>	3-year parts and labor, 5-year compressor (part only)

Model Number	Description
SKDL18-EDUS1	Cold holding Refrigerator 18", 115v/60hz/1ph, 2 drawer, 3" heavy-duty soft casters (two locking), NEMA 5-15P

Accessories	Description
25567	Adapter Bars for Fractional Pans
43581	Pan 1/6 Size, 4" Deep Plastic
43643	Pan 1/6 Size, 6" Deep Plastic
27066	Pan 1/3 Size, 4" Deep Plastic
26415	Pan 1/3 Size, 6" Deep Plastic

To learn more about **Cold Holding Refrigerator**, visit [silverking.com](http://silverking.com)