

# **Undercounters**

## 27" Undercounter Freezer

SKF27A-ESUS7

Specification Sheet



# **Features**

#### **Eco-Friendly Refrigerant**

R290 refrigerant with a global warming potential (GWP) of 3

#### **High-Strength Door**

Heavy-duty, stainless steel door assembled using high-load brackets for long lasting durability

#### **Stainless Steel Exterior**

Galvanized back and bottom to reduce the risk of corrosion

#### **Easy to Clean**

Aluminum interior, coved corners, finished edges, and removable shelves

#### **Heavy-Duty Soft Casters**

Secured to a 12 gauge steel base to ensure years of worry-free operation

### **High-Efficiency Refrigeration System**

Forced air circulation provides uniform temperature throughout the cabinet while automatic defrost self-manages ice buildup and evaporates moisture

#### **Cabinet Capacity**

Internal area of 6.3ft<sup>3</sup> with three (3) heavygauge wire shelves — adjustable in 1/2" increments using stainless steel pilasters

#### **Long-Lasting, Removable Gaskets**

Santoprene™ gaskets last four times longer than standard gaskets

#### **High-Density Insulation**


Foamed-in-place, CFC-free polyurethane insulation for maximum strength, rigidity, and insulation






# **Undercounters**27" Undercounter Freezer

Specification Sheet

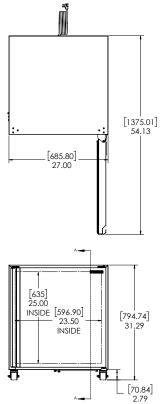



# **Technical Specifications**

<b>Electrical Requirements</b>	115v/60hz/1ph/2A/NEMA 5-15P Plug
Product Dimensions	27"W x 32.15"H x 29.32"D (68.58cm x 81.66cm x 74.47cm)
Product Weight	160lbs (72.57kg)
Shipping Dimensions	32"W x 40"H x 37"D (81.28cm x 101.60cm x 93.98cm)
Shipping Weight	175lbs (79.38kg)
Shipping Cubic Dimensions	27.41ft <sup>3</sup> (0.78m <sup>3</sup> )
Temperature Range	-5 to 5 (-20.6 to -15°C)
Charge Level	4.1oz (116 grams)
Insulation	CFC-free polyurethane foam-in-place insulation

Insulation	Foamed-in-place, CFC-free polyurethane
Exterior Construction	Stainless steel exterior with galvanized back and bottom
Interior Construction	Aluminum interior with coved corners and finished edges
Doors	One (1) right-hand swing door
Interior Capacity	6.3ft <sup>3</sup>
Door/Drawer Gasket	Santoprene™ gasket
Shelves	Three (3) heavy-gauge wire shelves
Casters	Four (4) 2" heavy-duty soft casters (two locking)
Certifications	ETL Safety, ETL Sanitation
Warranty	3-year parts and labor, 5-year compressor (part only)

Model Nu	ımber	Description
SKF27A-E	ESUS7	Undercounter Freezer 27", 115v/60hz/1ph, single right-hand swing door, 2" heavy-duty soft casters (two locking), condenser filter, 3 shelves, stainless steel liner bottom, NEMA 5-15P

To learn more about **Undercounter Freezer**, visit silverking.com

